




DISCOVER “ANOTHER DIMENSION”  
WHEN FISHING WITH A MAQ

# 360° STABILIZED OMNI SONAR

MAQ SONAR DETECTS SMALL SCHOOLS  
EVEN IN ROUGH SEAS

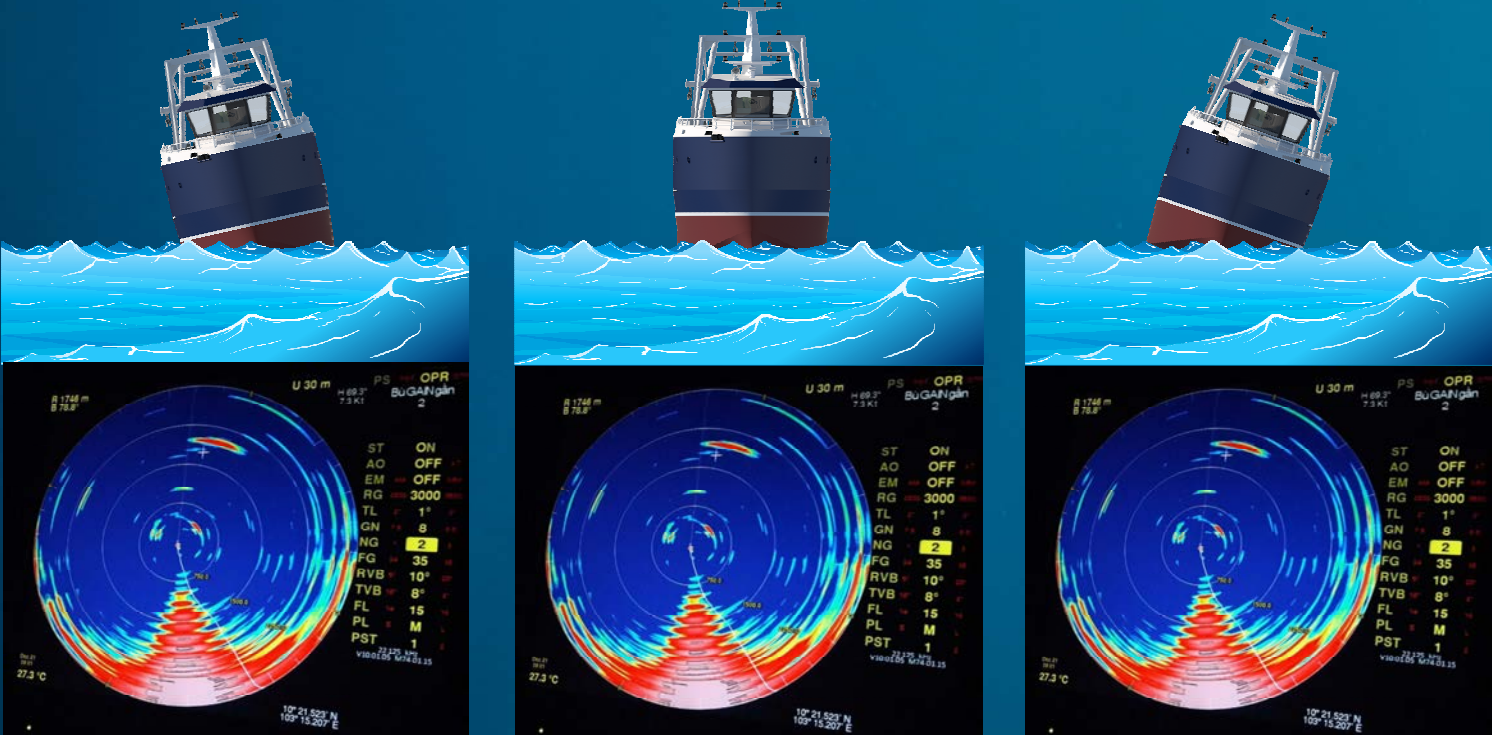

22KHz DISPLAY SHOWS DETECTION WITH SHADED TRANSMITTERS IN 6 FATHOMS OF WATER

FLEXIBLE ELECTRONICS ALLOWS THE USE OF A  
22KHz, 60KHz OR 90KHz TRANSDUCER.

# FEATURES

## TECHNICAL

- WHEN STABILIZATION IS ACTIVATED, BOTH THE HORIZONTAL AND VERTICAL OMNI BEAMS WILL BE ELECTRONICALLY STABILIZED FOR PITCH AND ROLL. THE BEAM STAYS ON THE TARGET INDEPENDENT OF THE VESSEL MOVEMENT. THIS MAINTAINS CONTACT WITH THE TARGET EVEN IN ROUGH SEAS.
- NON-STABILIZED SYSTEMS HAVE REDUCED PROBABILITY OF DETECTION AS WAVE HEIGHTS INCREASE.
- MAQ'S TRANSDUCERS DESIGN USES A THINNED ARRAY OF 256 ELEMENTS WHICH PRODUCES BETTER TRANSMIT/RECEIVE BEAMS BY REDUCING CROSS TALK BETWEEN ELEMENTS. THIS CONTROLS SIDE LOBE LEVELS FOR BETTER SHALLOW WATER PERFORMANCE ON HARD TO DETECT TARGETS. WHILE STILL PRODUCING THE POWER REQUIREMENTS FOR LONG RANGE DETECTION.
- VERTICAL PROFILE DISPLAY HAS THE SONAR SYSTEMS RESOLUTION OF 5° TO ACCURATELY DISPLAY THE TARGETS VERTICAL DENSITY.
- 60KHZ AND 90KHZ TRANSDUCERS ARE PROTECTED BY A REINFORCED ABS SHIELD
- 22KHZ TRANSDUCER HAS AN OPTIONAL STAINLESS STEEL SHIELD
- ELECTRONICS ARE ENCLOSED IN RUGGED STEEL SEALED CABINETS TO PREVENT CORROSION AND ARE COOLED USING HEAT PUMPS.
- COMMON ELECTRONICS FOR ALL FREQUENCY TRANSDUCERS. CHANGE THE TRANSDUCER FOR DIFFERENT FISHING APPLICATIONS.
- TRANSDUCER HOISTS USE BALL-SCREW ELECTRIC ACTUATORS FOR EFFICIENT (HIGH SPEED) RETRACTION.
- OPTIONAL RDT FEATURE ALLOWS GREATER DETECTION DISTANCES BY INCREASING THE TRANSMITTERS EFFECTIVE OUTPUT POWER BY 4 TIMES.
- MUCH OF THE ELECTRONIC HARDWARE DEVELOPMENT IS DOWNWARD COMPATIBLE TO ENSURE EXISTING SYSTEMS CAN BE REPAIRED OR UPGRADED FOR NEW FEATURES.

## OPERATING


- STABILIZATION IS INCLUDED WITH ALL SYSTEMS.
- STABILIZATION CAN BE ENABLED OR DISABLED
- HIGH RESOLUTION DISPLAY
- THE LATEST FEATURES ARE PROVIDED WITH FREE SOFTWARE UPGRADES
- OPTIONAL ROTATIONAL DIRECTION TRANSMISSION (RDT ON 22KHZ)
- SHIPS OWN DOPPLER NULLIFICATION
- CAPTAINS CHAIR JOYSTICK CONTROL
- OPERATOR ADJUSTABLE VERTICAL BEAM WIDTHS
- AUTOMATIC TARGET TRACKING
- EVENT MARKER DISPLAYS FISH HEADING AND SPEED
- VERTICAL PROFILE AND ZOOM MODES
- PEAK DETECTION TO DISPLAY MOST DENSE PART OF FISH SCHOOL
- PROPELLER NOISE REJECTER
- BOW-UP OR NORTH-UP DISPLAY
- PROGRAMMABLE TONNAGE READOUT
- WATER TEMPERATURE SENSING TO WITHIN 0.1°C OR 0.2 °F
- INTERFACES WITH POPULAR NET MONITORING SYSTEMS
- TRAWL MODES BOW AND STERN VIEWS.
- MULTI-LANGUAGE CONTROL PANELS
- PRE-SET SELECTION SETTINGS BY KEYPAD CONTROL UNIT
- WIND SPEED INTERFACE AND DISPLAY
- IN CIRCUIT FAULT LOCATOR AND FAULT INDICATOR

## WHAT IS RDT?

RDT (Rotational Directional Transmission) provides an advantage to the operator by increasing the effective transmit power and providing the operator a full stabilized narrow beam to see targets at further distances in shallow water and for near surface detection.

## TRAWL MODE DUAL DISPLAY

Simultaneously operate the Sonar with two separate range, tilt angle, gain and filter settings

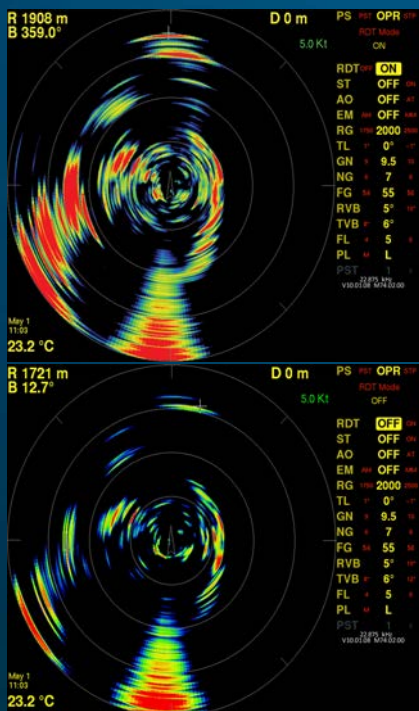

RDT  
ON  
OFF



RG	1750	2000	2500
TL	-4°	-5°	-6°
GN	9	9.5	10
NG	6	7	8
AO	OFF	OFF	AT
EM	AM	OFF	MM
RCG	OFF	OFF	1

RG	450	600	800
TL	-9°	-10°	-11°
GN	5	5.5	6
NG	5	6	7
AO	OFF	OFF	AT
EM	AM	OFF	MM
RCG	OFF	OFF	1

**MAQ Sonar's** proven design has been reconfigured to a fully stabilized system.

These systems have improvements to sensitivity with increased circuitry to support stabilization. While working in rough seas stabilization increases detection capabilities of fish targets, this allows MAQ's narrow beams to work near surface and in shallow water. An analogue front end is used to preserve the signal sensitivity which allows excellent small target detection capabilities.

The stabilized electronics can be used with either a 90KHz, 60KHz or 22KHz transducer but only the 22KHz has the RDT option. The RDT (Rotational Directional Transmit) 22KHz sonar uses additional Transmitters (one per element) to provide the high powered OMNI stabilized 6° vertical transmit beam.

# SYSTEMS

## MAQ STABILIZED OMNI

### SPECIAL FEATURES:

**360° RECEIVER STABILIZED**

**TRANSMISSION IS QUADRANT STABILIZED. IT PROVIDES NARROW BEAM TRANSMIT STABILIZATION FOR CALM AND SHALLOW WATER AND BROAD BEAM (SHADED) TRANSMISSION FOR ROUGH WATER PERFORMANCE. SHADED TRANSMIT REDUCES SHALLOW WATER REVERBERATION.**

**ALL MAQ STABILIZED TRANSDUCERS ARE COMPATIBLE WITH THESE ELECTRONICS**

**FEATURING 256 RECEIVER AND 64 TRANSMITTER CHANNELS .**

Chose one of these 3 frequencies.



**Processor**  
Dimensions  
H 60.96cm (24")  
W 39.37cm (15.5")  
D 20.035cm (10.25")



**Stabilized Transceiver**  
Dimensions  
H 60.96cm (24")  
W 55.9cm (22")  
D 20.035cm (10.25")



**90KHz**  
L 68.58cm (27")  
Ø 16.83cm (6.625")



**60KHz**  
L 74.93cm (29.5")  
Ø 16.83cm (6.625")



**22KHz**  
L 109.22cm (43")  
Ø 35.56cm (14")

## MAQ 22KHz RDT STABILIZED OMNI

### SPECIAL FEATURES:

**NARROW BEAM FULLY STABILIZED SHALLOW WATER PERFORMANCE IN ALL SITUATIONS**

**RECEIVER TRANSMITTER AND RDT STABILIZED (360°)**

**FEATURING 256 RECEIVER AND 256 TRANSMITTER CHANNELS .**



**Processor**  
Dimensions  
H 60.96cm (24")  
W 39.37cm (15.5")  
D 20.035cm (10.25")



**Stabilized Transceiver**  
Dimensions  
H 60.96cm (24")  
W 55.9cm (22")  
D 20.035cm (10.25")



**RDT transmitter**  
Dimensions  
H 60.96cm (24")  
W 55.88cm (22")  
D 20.035cm (10.25")



**RDT transmitter**  
Dimensions  
H 60.96cm (24")  
W 55.88cm (22")  
D 20.035cm (10.25")



**Junction Box**  
Dimensions  
H 35cm (13 - 3/4")  
W 30cm (11 - 3/4")  
D 17cm (6 - 3/4")







**22KHz**  
L 109.22cm (43")  
Ø 35.56cm (14")

THE 22KHz STABILIZED SYSTEM CAN BE UPGRADED TO RDT STABILIZED BY ADDING 2 X TRANSMITTER CABINETS AND THE JUNCTION BOX

**HOISTS NOT SHOWN FOR THESE SYSTEMS**

# RANGE PREDICTION

# MAQ SPECIFICATIONS

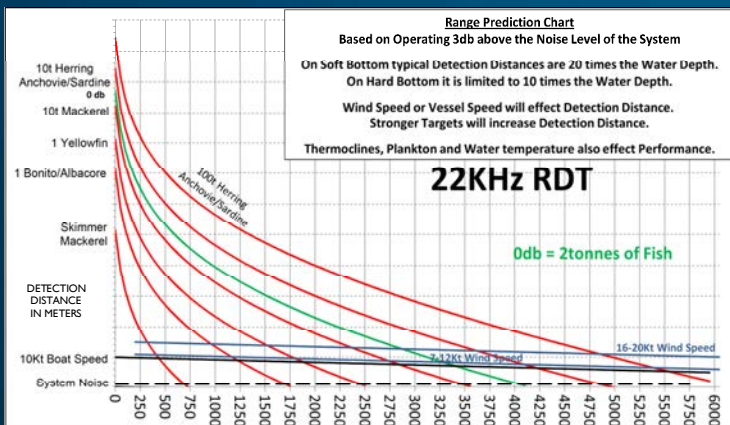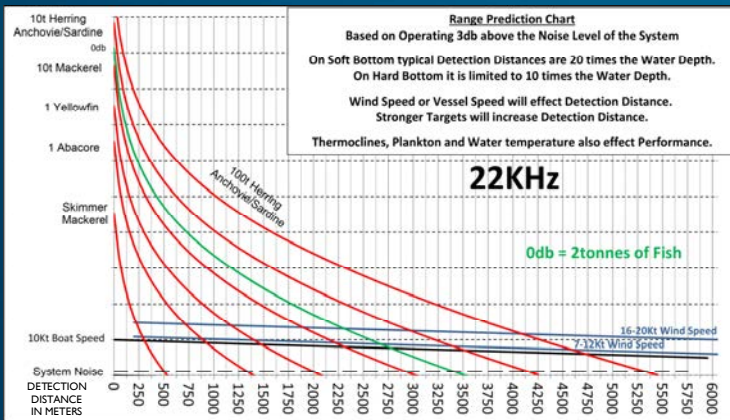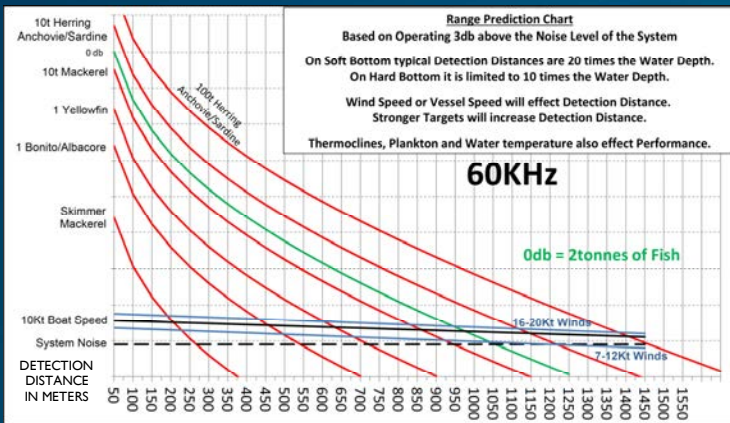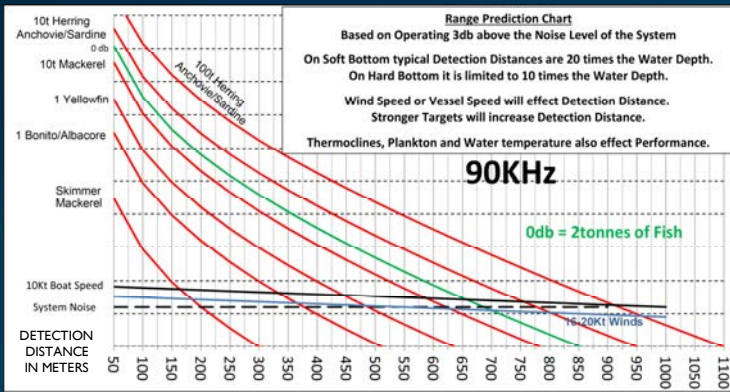

## MAQ Specifications

### JOYSTICK AND KEYPAD

On/Off Switch Push Button - LED Indicator

Sonar Control Push Button

Cursor (range, bearing, depth)

Audio Control - Volume (Speaker not supplied)

### PROCESSOR UNIT (NOTE: SUPPLIES POWER TO TRANSCEIVER AND TRANSMITTER UNITS)

Power Supply 230V/50Hz-60Hz @ 1A, 115V/50Hz-60Hz @ 2A

Industrial Computer System

Interface ITI, GPS & External Synchronization

Monitor NOT SUPPLIED

Corrosion Protection Sealed unit with anti-condensation heater and circulating fans

### TRANSCEIVER UNIT

Power Supply 230V/50Hz-60Hz @ 2.5A, 115V/50Hz-60Hz @ 5A

Transmitters 64 Channels

Receiver 32 Channels (256 pre-amplifiers)

Corrosion Protection Sealed unit with anti-condensation heater and circulation fans

### TRANSMITTER UNIT

Power Supply 230V/50Hz-60Hz @ 2.5A, 115V/50Hz-60Hz @ 5A

Transmitters 96 Channels EACH

Corrosion Protection Sealed unit with anti-condensation heater and circulation fans

### TRANSDUCERS

#### Vertical Beam

6°, 12°, 18°, 24°, 30°, SHADED 8°, 16°, 24°, 32°, and 40° Transmit, 5°, 10° and 20° Receive

Tilt - Up 10° to 45° Down

#### Horizontal Beam

Transmit - OMNI 360°@210dB and RDT 360°@216dB

Receive - 256 PRE-Amplifiers.

#### Frequencies Sea-Chest (NOT SUPPLIED)

90KHz 204mm (8") Nominal O.D.

60KHz 204mm (8") Nominal O.D.

22KHz 458mm (18") O.D.

#### Protective Shield

60KHz, 90KHz - ABS Shield

22KHz - (Optional) Stainless Steel Shield (10% loss in range)

HOIST (2 Positions)			
TYPE	SPEED	STROKE	VOLTAGE
90KHz	12s & 24s	0.45m (18") or 0.9m (36")	24VDC@10A
60KHz	12s & 24s	0.45m (18") or 0.9m (36")	24VDC@10A
22KHz	6s & 12s	1.2m (48")	24VDC@1A & 230/440VAC-3PH 1 1/2 HP

Disclaimer: The contents of this brochure are for marketing purposes only and should not be relied upon as being complete and accurate. No employee, agent, or representative of MAQ Sonar Company limited to any person, MAQ Sonar company it's employee, agent or representative will not accept any liability suffering or incurred by any person arising out of or in connection with any reliance on the content of or information contained in this brochure. This limitation applies to all loss or damage, indirect or consequential damage, loss of income or profit, loss of or damage of property and claims by third party.

BACK

Phone: (1) 613 984 9000 Fax: (1) 613 984 0909

Email: info@maqsonar.com

Box 199, 9 Church Street Finch, Ontario, Canada K0C 1K0